
## **Product Datasheet**

## **Alkaline**

LR03 Powerline




LR03

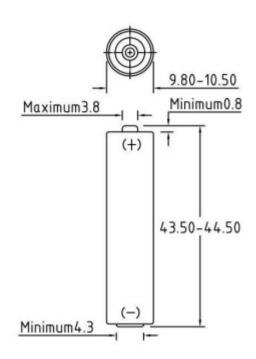

Type Designation	IEC: LR03 / JIS: AM3 / ANSI: 15A /AAA
Made in	China
Chemical System	Electrolyte-zinc-manganese dioxide (mercury & cadmium free)
Dimensions	See drawing
Nominal Voltage	1.5 V
Average Weight	11.4 g
Compliant to	IEC 60086-1, IEC 60086-2, IEC 60086-5, non-dangerous goods regulation EU directive 2006/66/EC
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Storage Temp. Range	+10°C ( 50°F)- +25°C ( 77°F)
Operating temp Range	-20°C ( -4°F)- +55°C ( 131°F)



## LR03 Powerline

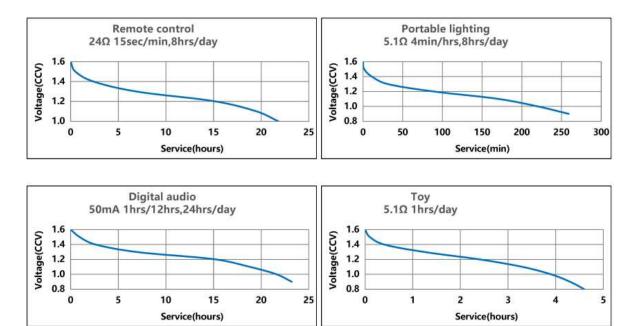

Expiry date marked on the bottom of the finished battery. (for example: "2027-08" means the expiry date is August 2027)

Copyright© Advance Power Solutions NV 2023 — All rights reserved. The information contained herein is believed to be correct. However no warranty is made, either expressed or implied regarding the accuracy or the results to be obtained from the use of such information. Test results are according to IEC conditions. Capacities of batteries are depending on drain, temperature and cut-off voltage. Data are subject to change without prior notification.

November 2023.

