

Hitachi Chemical
HITACHI



**Superior Cycle Life Improved
Performance Dependable
ENERGY OF INFINITY ►**

EVX series



BATTERY
CSB



Hitachi Chemical Energy Technology Co., Ltd.

EVX series

EVX-series batteries are specially designed for wheeled riding devices such as electric cars, bicycles, wheelchairs, golf carts, shopping carts, etc.

With new VRLA technology, the EVX series batteries are small, lightweight and can be used up for more than 400 cycles at 100% discharge.

As with all our ISO/UL certified batteries, EVH series batteries are rechargeable, efficient, maintenance-free, leakproof and suitable in any orientation.



In accordance with BS6290-4

Performance and Benefits :

- Innovative PAM manufacturing technique increases cycle by 150% over standard sealed Pb-acid
- Reduced internal resistance for superior performance
- Uniformed plate formation for consistent capacity
- Hundreds to thousands of recharge cycles (cycle life is based on temperature and depth of discharge)
- 100% capacity on first discharge
- No-spill design
- Maintenance-free

Feature Advantages :

- Strengthen adaptation of plates and separators, better discharging performance by high current
- Automatic welding manufacturing, higher quality control, improved consistency of battery pack
- Better anti-corrosion characteristics, excellent conductivity, less environmental pollution
- Long cycle life with outstanding low temperature application property
- Increase plate porosity, enhance reaction efficiency of active materials
- Enhanced lead recycle ability

Long Service Life :

- More than 400 cycles at 100% discharge cycle use

Reliability :

- Our batteries are 100% 2-cycle tested by computer charge and discharge System (CCDS).
- Our batteries are UL-recognized components under UL 1989. (File Number with MH 14533)
- ISO 9001/14001/18001 certified.

Core Technology :

- Latest enveloping & stacking machine investment from abroad
- Cutting-edge automatic welding COS technology development
- Consolidated AGM-GEL design advantages
- Patent additives for paste improvement
- Cadmium free Pb-Ca alloy grid

Applications :

Cycle use


- Golf carts
- Electric vehicles
- Portable telephone sets
- Portable lighting equipment
- Portable measuring equipment
- Camera and photographic equipment
- Portable VTR/TV, tape recorders and radios
- Power tools, lawn mowers, vacuum cleaners
- Portable personal computers and processors

Solar Cell Power Generation


- Street lighting
- Portable power supply
- Water pumping
- Rural power systems

BATTERY


Cycle Service Life

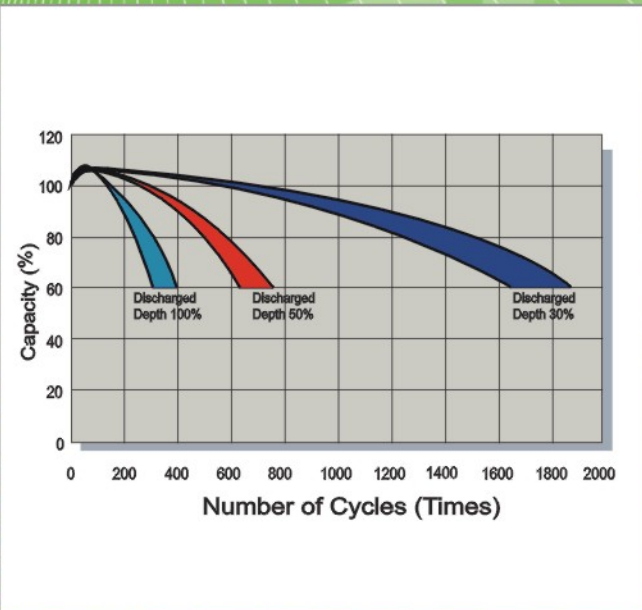


Battery Voltage and Charge Time for Cycle Use

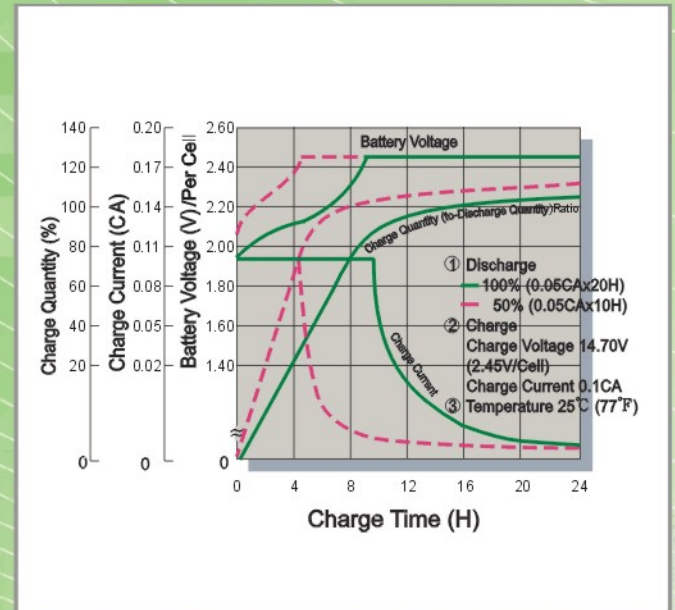

Capacity Retention Characteristics

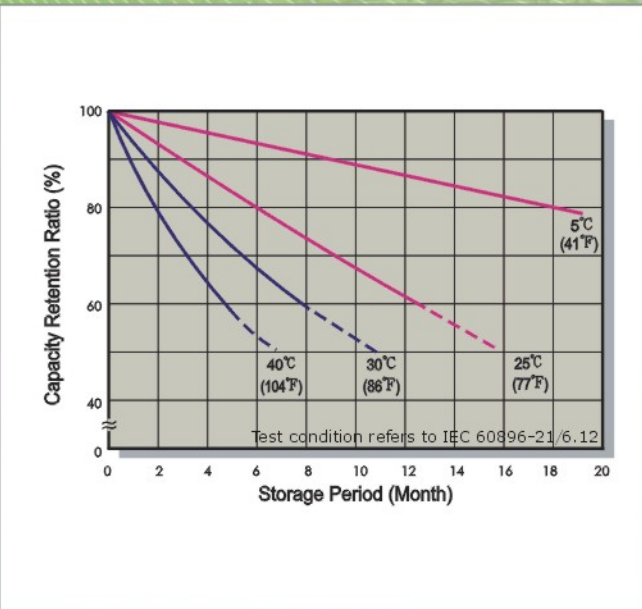

Discharge Characteristics

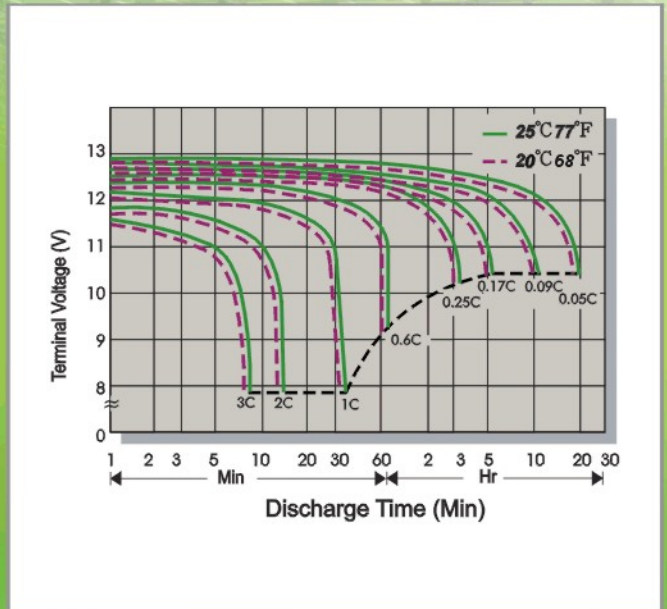

- The above diagrams are typical. For more detailed information please see the specific products sheets.
- C is the capacity of 20 hour-rate while the final voltage is 1.75V per cell
For example, 1C discharge current of EVX1272 is: $1 \times 7.2 = 7.2(A)$




Specifications

Battery Type	Nominal Voltage (V)	Nominal Capacity (Ah)*	Weight (Approx. Kg)	Internal Resistance (Approx. mΩ)	Short Circuit Current (A)	Max. Discharge Current 5 sec (A)	Dimensions (mm)				Terminal Type	Bolt	Max. Charge Current (A)	Max. Screw Torque Value	
							Overall Height (H)	Container Height (h)	Length (L)	Width (W)				Kgf.cm/ lbf.in	N.m
EVX1272	12	7.2	2.55	23.9	--	100/130	98.6±1.0	94.3±1.0	150.9±2.0	64.8±1.0	F1/F2	Faston Tab 187/250	2.16	--	--
EVX12120	12	12	3.83	15.4	--	150/180	100.3±1.5	94.1±1.0	151.0±2.0	96.0±1.0	F1/F2	Faston Tab 187/250	3.60	--	--
EVX12170	12	17	5.67	13.3	--	230	167.0±2.0	167.0±2.0	181.0±2.0	76.2±1.0	B1/B1B/B3	M5	5.10	59/51	5.73
EVX12200	12	20	6.70	12.5	--	230	167.0±2.0	167.0±2.0	181.0±2.0	76.2±1.0	I1	M5	6.00	59/51	5.73
EVX12260	12	26	8.65	9.6	--	350	125.0±1.5	125.0±1.5	166.0±2.0	175.0±2.0	B1/B3/B3B II	M5	7.80	59/51	5.73
EVX12300	12	30	10.40	7.9	--	400	175.0±2.0	175.0±2.0	166.0±2.0	125.0±1.5	I1	M5	9.00	59/51	5.73
EVX12340	12	34	10.77	9.2	--	400	178.3±2.0	154.8±2.0	195.6±2.0	130.0±1.5	B5	M6	10.20	138.6/120.3	13.58
EVX12400	12	40	13.20	8.2	--	400	170.4±2.0	170.4±2.0	197.0±2.0	165.0±2.0	B8/I2	M5/M6	12.00	59/138.6 51/120.3	5.73/13.58
EVX12520	12	52	18.30	5.2	--	500	219.3±2.5	201.3±2.5	248.0±2.5	138.4±1.5	B4	M6	15.60	138.6/120.3	13.58
EVX12650	12	65	22.20	4.6	--	500	174.9±2.0	174.9±2.0	349.4±2.5	166.0±2.0	B4/I2	M6	19.50	138.6/120.3	13.58
EVX12750	12	75	25.60	4.7	--	500	232.5±2.5	210.5±2.5	277.0±2.5	168.5±2.0	B6	M6	22.50	138.6/120.3	13.58

* Nominal Capacity 20hr-rate to 1.75V per cell @25 °C (77 °F)

• Charging voltage for cycle Use : 2.45±0.05V/Cell AT 25 °C (77 °F) Temp. Coefficient 5.0mV/°C

Terminal Type

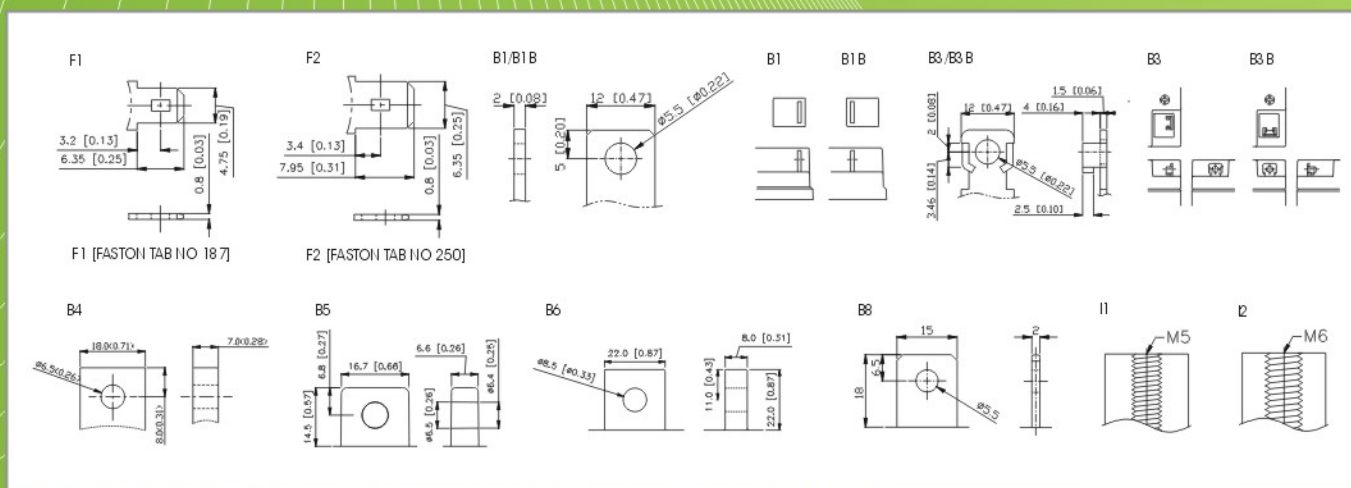

EVX1272

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	7.01	5.19	4.19	3.08	2.49	1.79	1.44	1.20	1.04	0.82	0.68	0.40
1.67V	6.79	5.01	4.04	2.98	2.40	1.73	1.39	1.16	1.00	0.79	0.65	0.38
1.70V	6.57	4.85	3.91	2.89	2.34	1.68	1.36	1.13	0.97	0.77	0.64	0.38
1.75V	6.38	4.71	3.80	2.81	2.27	1.63	1.32	1.10	0.95	0.75	0.62	0.36
1.80V	6.20	4.58	3.70	2.73	2.19	1.58	1.28	1.07	0.92	0.72	0.60	0.35
1.85V	6.00	4.44	3.58	2.65	2.13	1.53	1.24	1.04	0.89	0.70	0.58	0.33

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	84.1	62.3	50.3	37.0	29.6	21.5	17.3	14.4	12.4	9.81	8.20	4.53
1.67V	81.4	60.3	48.8	35.8	28.8	20.9	16.8	14.0	12.0	9.50	7.86	4.35
1.70V	79.2	58.6	47.3	34.8	27.9	20.2	16.3	13.6	11.7	9.24	7.72	4.27
1.75V	76.8	56.8	45.9	33.8	27.1	19.6	15.8	13.2	11.4	8.96	7.49	4.14
1.80V	74.4	55.0	44.4	32.7	26.2	19.0	15.3	12.8	11.0	8.67	7.25	4.00
1.85V	72.0	53.3	43.0	31.7	25.4	18.4	14.8	12.4	10.7	8.39	7.02	3.87

BATTERY

EVX12120

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)												
F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	12.8	9.38	7.52	5.46	4.32	3.14	2.45	2.06	1.75	1.36	1.13	0.66
1.67V	12.7	9.30	7.45	5.45	4.29	3.10	2.44	2.05	1.74	1.35	1.12	0.63
1.70V	12.6	9.23	7.40	5.41	4.28	3.09	2.43	2.04	1.73	1.34	1.11	0.62
1.75V	12.4	9.14	7.36	5.36	4.25	3.07	2.41	2.01	1.71	1.33	1.09	0.60
1.80V	12.0	8.89	7.18	5.28	4.17	3.00	2.38	1.99	1.70	1.32	1.07	0.59
1.85V	11.3	8.46	6.89	5.08	3.99	2.90	2.30	1.92	1.64	1.27	1.04	0.57
Constant Power Discharge Characteristics Unit: W (25°C, 77°F)												
F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	146	107	86.1	63.4	50.5	36.8	29.3	24.4	20.8	16.2	13.4	7.13
1.67V	146	107	85.7	62.9	50.1	36.6	29.1	24.3	20.7	16.1	13.3	7.09
1.70V	144	106	85.2	62.7	50.0	36.4	28.9	24.2	20.6	16.0	13.2	7.06
1.75V	143	105	84.9	62.3	49.5	36.2	28.8	23.9	20.4	15.9	13.1	7.01
1.80V	140	103	83.5	61.2	49.0	35.7	28.5	23.7	20.2	15.7	12.9	6.87
1.85V	132	98.5	80.0	59.4	47.4	34.5	27.7	23.0	19.6	15.2	12.5	6.66

EVX12170

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)												
F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	17.0	12.7	10.3	7.34	5.94	4.43	3.55	2.92	2.51	1.98	1.63	0.93
1.67V	16.5	12.3	9.94	7.14	5.77	4.28	3.43	2.84	2.44	1.92	1.58	0.90
1.70V	16.0	11.9	9.67	6.91	5.62	4.16	3.34	2.76	2.37	1.87	1.54	0.88
1.75V	15.5	11.6	9.38	6.70	5.43	4.04	3.24	2.68	2.30	1.81	1.49	0.85
1.80V	15.0	11.2	9.08	6.48	5.25	3.91	3.14	2.59	2.22	1.75	1.44	0.83
1.85V	14.5	10.8	8.79	6.27	5.09	3.79	3.04	2.51	2.15	1.69	1.39	0.80
Constant Power Discharge Characteristics Unit: W (25°C, 77°F)												
F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	204	152	123	88.1	71.6	53.1	42.6	35.0	30.1	23.8	19.6	10.8
1.67V	198	148	120	85.5	69.5	51.3	41.3	34.1	29.3	23.1	18.8	10.4
1.70V	192	143	116	82.9	67.9	49.9	40.1	33.1	28.4	22.4	18.5	10.2
1.75V	186	139	113	80.4	65.5	48.4	38.9	32.1	27.6	21.7	17.9	9.90
1.80V	180	134	109	77.8	63.3	46.9	37.7	31.1	26.7	21.0	17.3	9.59
1.85V	174	130	106	75.3	61.4	45.4	36.5	30.1	25.8	20.3	16.7	9.29

EVX12200

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)												
F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	20.6	15.4	12.5	9.25	7.43	5.28	4.19	3.45	2.95	2.30	1.89	1.09
1.67V	20.0	15.0	12.3	8.99	7.25	5.15	4.10	3.35	2.86	2.23	1.85	1.06
1.70V	19.5	14.6	11.9	8.76	7.04	5.02	3.99	3.26	2.79	2.18	1.80	1.04
1.75V	18.9	14.2	11.6	8.50	6.79	4.85	3.85	3.16	2.71	2.12	1.75	1.00
1.80V	18.2	13.6	11.1	8.17	6.50	4.68	3.69	3.03	2.59	2.03	1.68	0.96
1.85V	17.4	13.0	10.6	7.84	6.22	4.49	3.52	2.89	2.48	1.95	1.62	0.92
Constant Power Discharge Characteristics Unit: W (25°C, 77°F)												
F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	247	184	150	111	88.7	63.4	50.3	41.4	35.4	27.6	22.7	12.3
1.67V	240	180	147	108	86.2	61.6	48.9	40.2	34.3	26.8	22.0	11.9
1.70V	233	175	143	105	83.7	60.0	47.5	39.1	33.4	26.0	21.5	11.7
1.75V	226	169	138	101	80.6	58.1	45.9	37.6	32.2	25.2	20.8	11.3
1.80V	218	163	133	98.0	77.4	56.1	44.3	36.3	31.1	24.3	20.1	10.8
1.85V	209	156	127	94.0	74.4	53.8	42.3	34.6	29.7	23.3	19.3	10.4

EVX12260

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)												
F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	27.3	20.3	16.5	11.8	9.54	7.03	5.66	4.68	4.03	3.18	2.63	1.44
1.67V	26.5	19.7	16.0	11.4	9.22	6.82	5.49	4.56	3.92	3.09	2.56	1.41
1.70V	25.7	19.1	15.5	11.1	8.97	6.59	5.32	4.43	3.81	3.00	2.48	1.37
1.75V	24.9	18.5	15.0	10.8	8.68	6.39	5.16	4.30	3.70	2.91	2.40	1.33
1.80V	24.1	18.0	14.6	10.4	8.41	6.19	5.00	4.16	3.57	2.81	2.32	1.28
1.85V	23.3	17.4	14.1	10.1	8.13	5.99	4.84	4.03	3.46	2.72	2.24	1.24
Constant Power Discharge Characteristics Unit: W (25°C, 77°F)												
F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	328	244	198	141	114	84.3	67.9	56.2	48.4	38.2	31.5	17.3
1.67V	318	237	192	137	111	81.4	65.7	54.6	47.0	37.2	30.6	16.9
1.70V	308	229	186	133	107	79.1	63.8	53.2	45.7	36.0	29.7	16.4
1.75V	299	223	181	129	104	76.7	61.9	51.6	44.3	34.9	28.8	15.9
1.80V	289	216	175	125	101	74.3	60.0	49.9	42.9	33.7	27.8	15.4
1.85V	280	209	170	121	97.1	71.9	58.1	48.3	41.5	32.6	26.9	14.9

EVX12300**Constant Current Discharge Characteristics Unit: A (25°C, 77°F)**

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	31.2	22.4	17.7	12.7	10.3	7.48	6.05	5.03	4.32	3.39	2.82	1.61
1.67V	30.6	21.9	17.3	12.3	9.94	7.26	5.87	4.90	4.20	3.29	2.75	1.58
1.70V	30.0	21.4	16.8	11.9	9.66	7.04	5.70	4.76	4.09	3.21	2.68	1.54
1.75V	29.2	20.8	16.3	11.6	9.38	6.83	5.54	4.64	3.98	3.12	2.61	1.50
1.80V	28.4	20.2	15.8	11.3	9.07	6.61	5.37	4.51	3.87	3.04	2.53	1.45
1.85V	27.6	19.5	15.3	10.9	8.79	6.40	5.21	4.39	3.76	2.94	2.46	1.41

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	374	268	212	152	123	89.8	72.6	60.4	51.5	40.1	33.1	17.3
1.67V	367	263	207	147	120	87.1	70.4	58.6	50.1	39.1	32.2	16.8
1.70V	359	256	202	143	116	84.5	68.4	57.1	48.8	38.1	31.4	16.4
1.75V	351	250	196	139	112	81.9	66.4	55.6	47.5	37.0	30.5	15.9
1.80V	341	242	190	135	109	79.3	64.4	54.1	46.1	35.9	29.5	15.4
1.85V	332	235	184	131	105	76.7	62.4	52.6	44.8	34.7	28.4	14.9

EVX12340**Constant Current Discharge Characteristics Unit: A (25°C, 77°F)**

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	34.5	25.2	20.2	14.6	11.6	8.25	6.53	5.39	4.62	3.63	3.06	1.85
1.67V	33.6	24.7	19.8	14.5	11.5	8.19	6.49	5.34	4.57	3.57	3.02	1.80
1.70V	32.8	24.2	19.5	14.3	11.3	8.12	6.42	5.28	4.51	3.51	2.95	1.76
1.75V	31.8	23.6	19.1	14.0	11.2	8.02	6.36	5.22	4.45	3.46	2.90	1.72
1.80V	30.8	23.0	18.7	13.8	11.0	7.86	6.27	5.14	4.38	3.41	2.86	1.69
1.85V	29.9	22.4	18.3	13.5	10.8	7.74	6.12	5.07	4.32	3.36	2.82	1.65

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	414	302	242	175	141	99.0	78.4	64.7	55.5	43.6	36.0	19.5
1.67V	404	296	238	173	139	98.3	78.0	64.1	54.8	42.8	35.3	19.0
1.70V	393	290	234	171	137	97.4	77.4	63.4	54.1	42.2	34.6	18.5
1.75V	382	283	229	168	135	96.3	76.5	62.6	53.4	41.5	33.9	18.0
1.80V	370	276	224	165	132	95.1	75.5	61.8	52.7	40.9	33.4	17.6
1.85V	359	269	219	162	130	93.7	74.2	60.8	51.8	40.3	32.9	17.1

EVX12400**Constant Current Discharge Characteristics Unit: A (25°C, 77°F)**

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	38.1	28.3	22.9	16.8	13.4	9.75	7.76	6.42	5.50	4.31	3.59	2.17
1.67V	37.0	27.5	22.3	16.3	13.0	9.47	7.52	6.24	5.34	4.18	3.49	2.12
1.70V	35.8	26.7	21.7	15.8	12.7	9.17	7.33	6.07	5.19	4.05	3.40	2.05
1.75V	34.8	25.9	21.0	15.3	12.3	8.88	7.09	5.91	5.05	3.94	3.30	2.00
1.80V	33.7	25.1	20.3	14.8	11.9	8.58	6.89	5.70	4.88	3.82	3.17	1.94
1.85V	32.6	24.1	19.5	14.4	11.4	8.29	6.63	5.48	4.70	3.68	3.09	1.89

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	457	340	275	201	162	117	93.0	76.8	65.0	49.9	41.1	22.3
1.67V	444	330	268	196	157	113	90.1	74.6	63.1	48.4	40.0	21.6
1.70V	430	320	260	189	152	110	87.6	72.3	61.1	46.9	38.8	20.9
1.75V	417	311	252	184	147	107	84.5	69.9	59.2	45.5	37.6	20.3
1.80V	404	300	243	178	143	103	81.5	67.4	57.1	44.0	36.4	19.6
1.85V	391	290	235	173	138	99.5	78.9	64.9	55.1	42.6	35.2	19.0

EVX12520**Constant Current Discharge Characteristics Unit: A (25°C, 77°F)**

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	64.9	46.6	36.8	27.0	21.0	14.8	11.7	9.60	8.30	6.60	5.42	2.84
1.67V	63.5	45.9	36.4	26.8	20.8	14.6	11.6	9.52	8.22	6.52	5.36	2.80
1.70V	62.1	45.0	35.8	26.5	20.6	14.5	11.5	9.45	8.15	6.45	5.29	2.76
1.75V	60.6	44.1	35.2	26.1	20.3	14.3	11.4	9.37	8.05	6.34	5.21	2.72
1.80V	59.2	43.3	34.7	25.6	20.1	14.2	11.3	9.26	7.94	6.22	5.12	2.68
1.85V	57.8	42.5	34.2	25.1	19.9	14.1	11.2	9.16	7.83	6.11	5.03	2.62

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	668	485	386	284	221	154	124	102	88.6	70.9	58.7	33.6
1.67V	656	478	382	281	219	153	123	101	87.7	70.2	58.1	33.1
1.70V	645	472	378	277	217	152	122	100	86.8	69.4	57.4	32.5
1.75V	631	463	372	273	214	151	121	99.0	85.9	68.6	56.7	31.8
1.80V	615	455	368	269	212	150	120	98.1	84.9	67.6	55.8	31.1
1.85V	598	447	363	264	209	149	119	97.0	83.6	66.1	54.8	30.4

EVX12650**Constant Current Discharge Characteristics Unit: A (25°C, 77°F)**

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	70.5	51.5	41.2	30.0	23.9	17.0	13.4	11.1	9.57	7.57	6.31	3.38
1.67V	69.9	51.2	41.1	29.8	23.7	16.9	13.3	11.0	9.50	7.54	6.28	3.35
1.70V	69.4	50.9	40.8	29.6	23.6	16.8	13.2	10.9	9.43	7.50	6.24	3.34
1.75V	68.3	50.2	40.4	29.4	23.4	16.7	13.1	10.8	9.34	7.42	6.16	3.31
1.80V	65.7	48.7	39.4	28.8	23.0	16.4	12.9	10.7	9.22	7.28	6.04	3.23
1.85V	61.3	45.9	37.4	27.5	22.0	15.7	12.4	10.2	8.81	6.99	5.78	3.11

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	806	598	484	353	279	199	158	132	114	90.0	74.7	40.3
1.67V	804	595	481	351	277	198	157	130	113	89.6	74.3	40.2
1.70V	795	590	477	350	276	197	156	129	112	89.2	74.2	40.0
1.75V	784	585	475	347	275	196	155	128	111	88.2	73.2	39.7
1.80V	759	571	467	342	270	193	151	127	110	86.9	72.0	38.9
1.85V	714	542	446	329	259	186	147	122	105	83.2	68.9	37.8

EVX12750**Constant Current Discharge Characteristics Unit: A (25°C, 77°F)**

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	83.2	61.3	49.3	35.7	28.1	19.9	15.6	12.8	10.8	8.35	6.82	3.84
1.67V	81.6	60.3	48.6	35.2	27.6	19.7	15.4	12.7	10.7	8.25	6.74	3.80
1.70V	80.1	59.2	47.8	34.6	27.2	19.4	15.2	12.5	10.6	8.15	6.67	3.77
1.75V	78.1	57.9	46.8	33.9	26.7	19.2	15.0	12.4	10.5	8.07	6.60	3.75
1.80V	75.8	56.4	45.7	33.2	26.2	18.9	14.8	12.2	10.3	7.98	6.54	3.72
1.85V	73.3	54.7	44.4	32.5	25.7	18.6	14.6	12.0	10.2	7.89	6.47	3.68

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	924	673	538	392	313	226	177	146	124	95.2	77.5	41.4
1.67V	906	664	532	386	309	223	175	144	122	94.3	77.0	41.2
1.70V	887	652	524	380	304	219	172	142	121	93.4	76.4	41.0
1.75V	863	637	513	373	299	216	170	140	119	92.3	75.7	40.7
1.80V	839	620	500	367	293	213	168	139	118	91.3	75.0	40.6
1.85V	813	600	484	359	288	210	165	137	117	90.3	74.2	39.8

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.com





SALES OFFICE:

Hitachi Chemical Energy Technology Co., Ltd.
GLOBAL HQ

11F, No.150, Sec.4, Chengde Rd.,
Shilin Dist., Taipei City 11167, Taiwan (R.O.C.)
Tel : +886-2-2880-5600
Fax : +886-2-2888-3300
Mail : service@hitachi-chem-en.com.tw

Hitachi Chemical Energy Technology (Americas) Co., Ltd.
AMERICA HQ

4008 Clay Avenue, Suite 210,
Haltom City, TX 76117, U.S.A
Tel : +1-817-244-7777 / 1-(800)3-CSB-USA(272872)
Fax : +1-817-244-4445
Mail : service@hitachi-chem-en.us

Hitachi Chemical Energy Technology (Shanghai) Co., Ltd.
SHANGHAI OFFICE

Room 2105, Qiang Sheng Tower, Pu Jian Rd.,
Shanghai, China PC : 200127
Tel : +86-21-5046-1622 / +86-21-5046-0833
+86-21-5046-0094
Fax : +86-21-5046-1046
Mail : service@hitachi-chem.en.sh.cn

MANUFACTURING SITE:

Hitachi Chemical Energy Technology Co., Ltd.
TAIWAN GUANTIAN FACTORY

No.16, Gongye W. Rd., Erzhen Village,
Guantian District, Tainan City 72048, Taiwan (R.O.C.)
Tel : +886-6-698-7600
Fax : +886-6-698-5734

Hitachi Chemical Energy Technology Co., Ltd (Philippines Branch)
PHILIPPINES FACTORY

Panorama Compound NO.7, South Avenue,
Phase3, PEZA, Rosario, Cavite, Philippines 4106
Tel : 63-46-437-0688 / 63-46-437-0838
Fax : 63-46-437-0980

CSB BATTERY TECHNOLOGIES (BEIJING) CO., LTD. (CHINA)
BEIJING OFFICE

Room 1009, 10th Building, Wanda Plaza,
Jianguo Rd., Chaoyang Dis., Beijing, China PC : 100022
Tel : +86-10-5820-5336 / +86-10-5820-5338
Fax : +86-10-5820-3053
Mail : chinasls@csb-battery.com

Hitachi Chemical Energy Technology (EMEA) B.V.
EUROPE HQ

Keurmeesterstraat 28-30,
2984 BA Ridderkerk, The Netherlands
Tel : +31-(0)-180-418-140
Fax : +31-(0)-180-418-327
Mail : service@hitachi-chem-en.co.nl

Hitachi Chemical Energy Technology (Shanghai) Co., Ltd.
SHENZHEN OFFICE

Room 2103-2105, Block East,
City Professional Hub, Shennan Avenue,
Futian, Shenzhen, China PC : 518040
Tel : +86-755-8831-6488 / +86-755-8831-6775
+86-755-8831-6075
Fax : +86-755-8831-6548
Mail : service@hitachi-chem.en.sh.cn

Hitachi Chemical Energy Technology (Vietnam) Co., Ltd
VIETNAM FACTORY

Duong so 4, Khu Cong Nghiep Nhon Trach 3 – Giai Doan 2,
Xa Long Tho, Huyen NhonTrach, Tinh Dong Nai, Viet Nam
Tel : +84-61-356-9120
Fax : +84-61-356-9165